




# Kvaser Arcus 100/1000BASE-T1 H-MTD



See more products

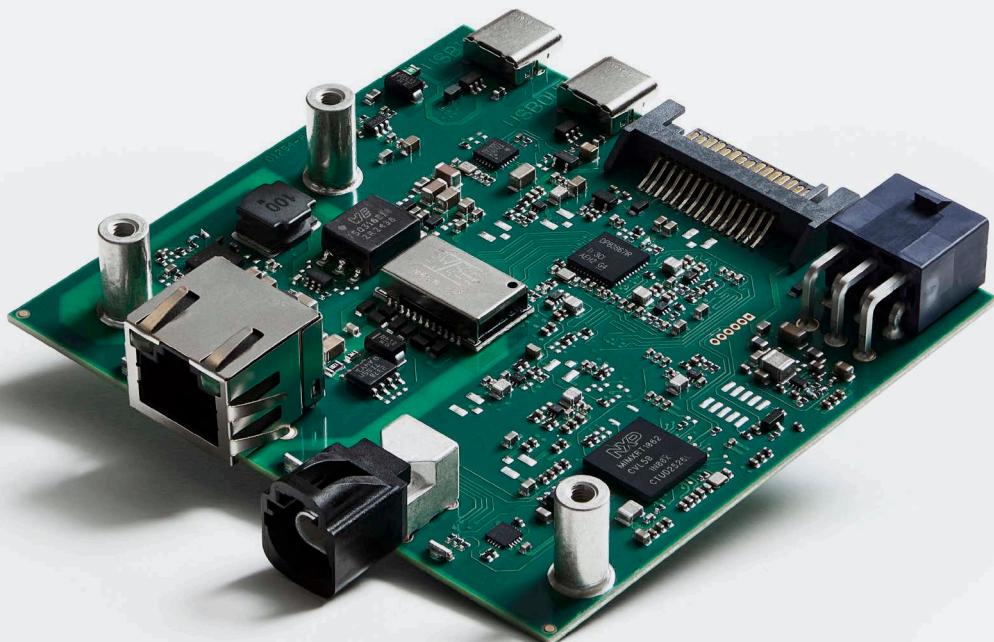

## Your reliable connection to Automotive Ethernet networks

Kvaser Arcus 100/1000BASE-T1 H-MTD is a high-performance Automotive Ethernet media converter designed to simplify access to vehicle networks. It provides fast, stable, and secure full-duplex conversion between Automotive Ethernet 100/1000BASE-T1 and Standard Ethernet 100/1000BASE-T, making it suitable for lab testing, in-vehicle development, and system start-up workflows. Its transparent back-to-back PHY architecture enables deeper link-level insight and precise analysis of physical-layer behavior during development and validation.

Designed for simple integration into embedded computers, it can also be installed in standard computers using the Kvaser ATX Bracket for Arcus 100/1000BASE-T1 H-MTD (EAN 73-30130-01811-2).

### **Warranty**

2-year warranty. See our general conditions and policies for details.

### **Support**

Free support for all products by contacting [support@kvaser.com](mailto:support@kvaser.com)

### **EAN**

73-30130-01810-5

## Major Features

- Monitor Automotive Ethernet traffic from a data logger or test PC during vehicle development and testing
- Flash ECUs over Automotive Ethernet, IP/Ethernet-based protocols, by connecting a vehicle network to a development PC
- Access link-level information for debugging tasks using PHY-exposed parameters such as link status, speed, and signal quality
- Transmit crafted Ethernet frames for testing ECU behavior, link robustness, and protocol handling
- Evaluate secure communication behavior by observing MAC-layer characteristics and checking resilience to invalid or unexpected traffic
- Verify cable integrity using SQI (Signal Quality Index), BER (Bit Error Rate), and built-in cable diagnostics to detect shorts, opens, and pair mismatches
- Supports testing of partial networks by allowing a PC application to emulate expected link activity when an ECU is not present
- Check early-boot communication sequences between ECUs and bootloaders during initial system start-up
- Intuitive API and GUI for adjusting PHY settings and configurations via USB
- Designed to meet the requirements of the Cyber Resilience Act (CRA) as well as Open Alliance recommendations



## Technical Data

|                       |                              |
|-----------------------|------------------------------|
| Dimensions            | 81 x 85 x 20 mm              |
| Ethernet Channel 1    | 100/1000BASE-T, RJ45 8p8     |
| Ethernet Channel 2    | 100/1000BASE-T1, H-MTD Key Z |
| Operating Temperature | -40 to +85 °C                |
| Power input           | PoE, USB-C, ATX, SATA        |
| Regulatory Compliance | CE, FCC                      |
| Relative humidity     | 0% to 85% (non-condensing)   |
| USB IN                | USB 2.0 Type-C               |
| USB OUT               | USB 2.0 Type-C               |
| Weight                | 50 g                         |

## Technical Data Future Features

|                                    |     |
|------------------------------------|-----|
| Bit Error Rate Analysis            | Yes |
| Cable Tester (T1 PHY) <sup>1</sup> | Yes |
| Packet Generator                   | Yes |
| Signal Quality Indicator           | Yes |
| TC10 Compliance (T1 PHY)           | Yes |

<sup>1</sup> Detects short/open conditions, mismatched pairs, and improper pinouts using the built-in cable tester.